


043

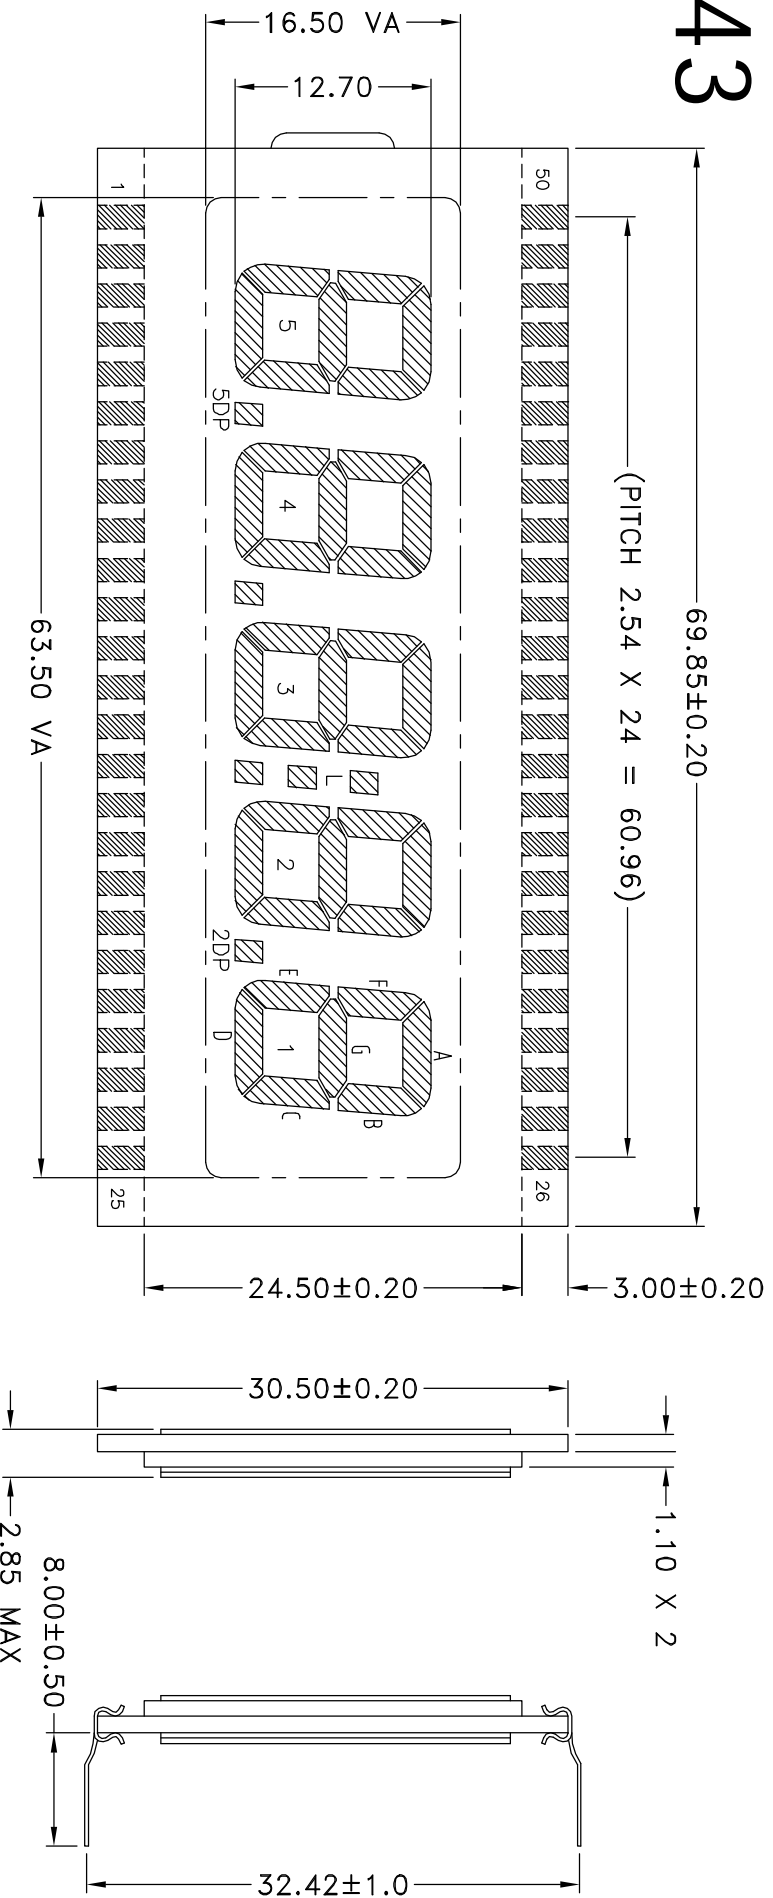

ELASTOMER TYPE PIN TYPE

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13
COM/COM	NC	NC	NC	NC	NC	5E	5D	5C	5DP	4E	4D	4C	4DP
PIN	14	15	16	17	18	19	20	21	22	23	24	25	26
COM	3E	3D	3C	3DP	2E	2D	2C	2DP	1E	1D	1C	1B	1A
PIN	27	28	29	30	31	32	33	34	35	36	37	38	39
COM	1F	1G	2B	2A	2F	2G	L	3B	3A	3F	3G	4B	4A
PIN	40	41	42	43	44	45	46	47	48	49	50		
COM	4F	4G	NC	5B	5A	5F	5G	NC	NC	NC	COM		

- NOTES:
1. LCD MODE : TN
 2. OPERATING VOLTAGE : 3.0V
 3. DRIVE METHOD : STATIC
 4. VIEW DIRECTION : 6 / 12 O'CLOCK
 5. OPERATING TEMP : NORMAL : -10°C TO 60°C, WIDE : -30°C TO 80°C
 6. STORAGE TEMP : NORMAL : -20°C TO 70°C, WIDE : -40°C TO 85°C
 7. POLARIZER MODE : REFLECTIVE / TRANSMISSIVE / TRANSMISSIVE

VERSION : 1

Displaytech Ltd

email : sales@displaytech.com.hk
 Fax : +852 2722 6998