


# 123

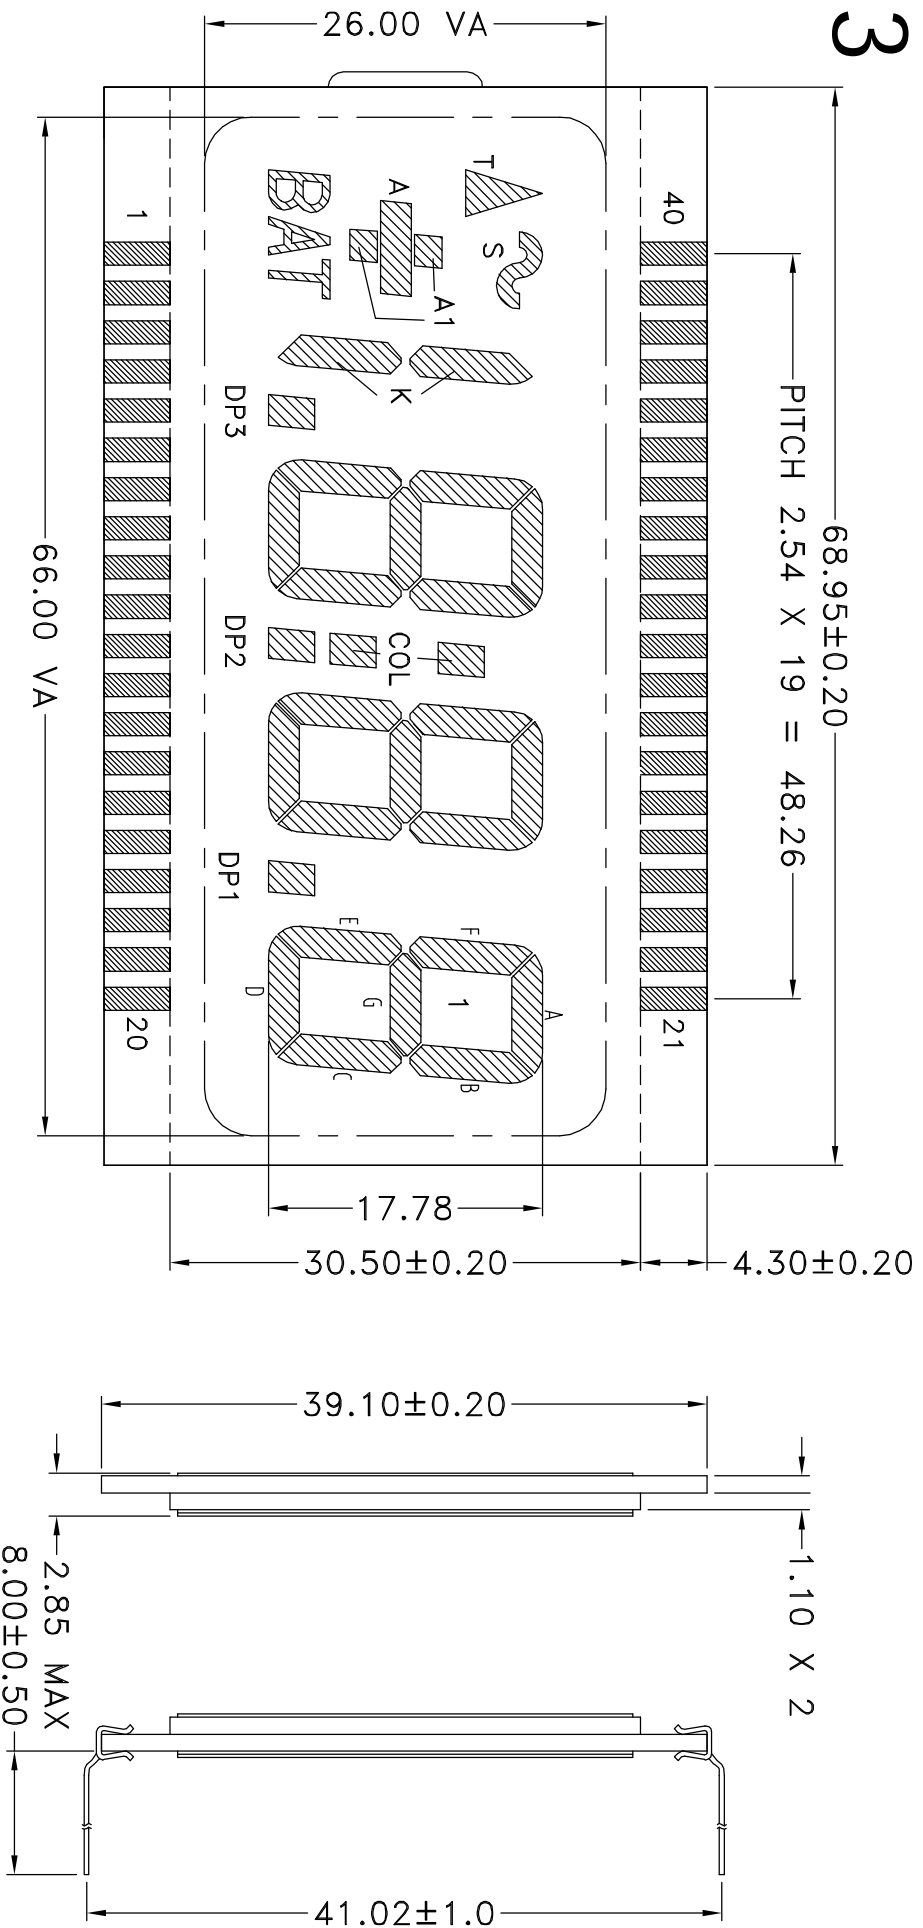

ELASTOMER TYPE PIN TYPE

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM	COM	A	K	/	/	/	/	DP3	3E	3D	3C	DP2	2E	2D	2C	DP1	1E	1D	1C	1B
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM	1A	1F	1G	2B	2A	2F	2G	COL	3B	3A	3F	3G	/	/	/	/	S	T	A1	BAT

- NOTES:
1. LCD MODE : TN
  2. OPERATING VOLTAGE : 3.0V
  3. DRIVE METHOD : STATIC
  4. VIEW DIRECTION : 6 / 12 O'CLOCK
  5. OPERATING TEMP : NORMAL : -10°C TO 60°C, WIDE : -30°C TO 80°C
  6. STORAGE TEMP : NORMAL : -20°C TO 70°C, WIDE : -40°C TO 85°C
  7. POLARIZER MODE : REFLECTIVE / TRANSMISSIVE / TRANSMISSIVE

VERSION : 1

**Displaytech Ltd**

email : [sales@displaytech.com.hk](mailto:sales@displaytech.com.hk)  
 Fax : +852 2722 6998