


# 150

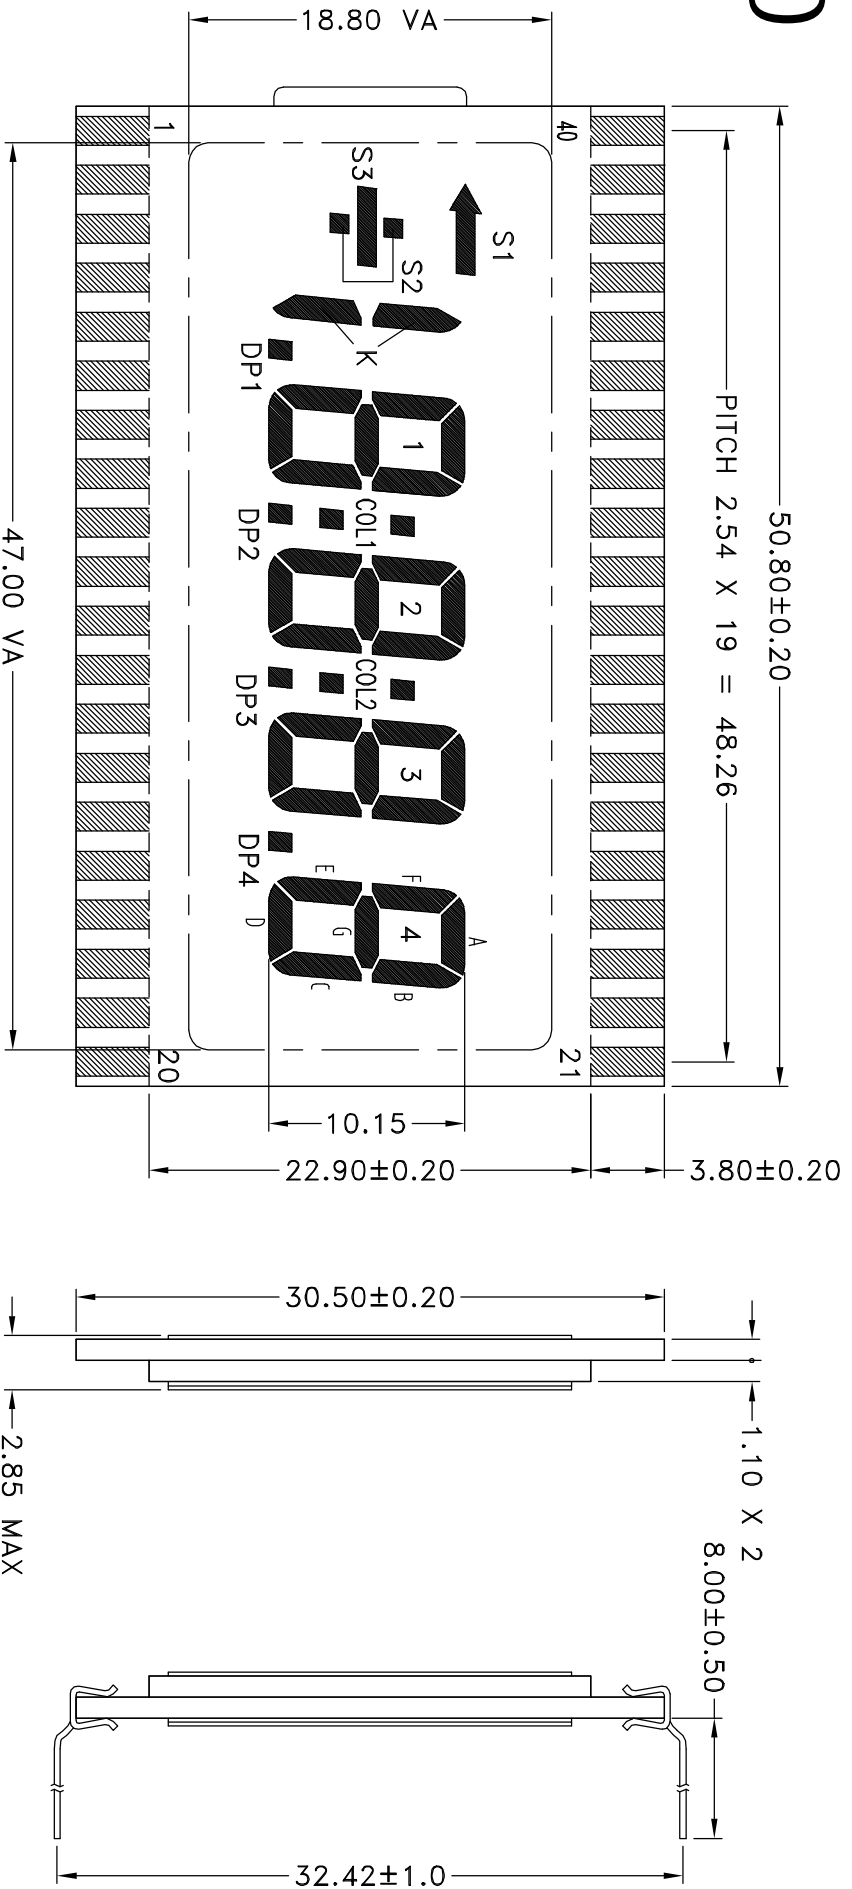

**NOTES:**

1. LCD MODE : TN
2. OPERATING VOLTAGE : 3.0V
3. DRIVE METHOD : STATIC
4. VIEW DIRECTION : 6 / 12 O'CLOCK
5. OPERATING TEMP : NORMAL : -10°C TO 60°C, WIDE : -30°C TO 80°C
6. STORAGE TEMP : NORMAL : -20°C TO 70°C, WIDE : -40°C TO 85°C
7. POLARIZER MODE : REFLECTIVE / TRANSMISSIVE / TRANSMISSIVE

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM	COM	S3	K	DP1	1E	1D	1C	DP2	2E	2D	2C	DP3	3E	3D	3C	DP4	4E	4D	4C	4B
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM	4A	4F	4G	3B	3A	3F	3G	COL2	2B	2A	2F	2G	COL1	1B	1A	1F	1G	S1	S2	COM

ELASTOMER TYPE      PIN TYPE

**Displaytech Ltd**

email : [sales@displaytech.com.hk](mailto:sales@displaytech.com.hk)  
 Fax : +852 2722 6998